



KTBdesigns Tool Set

Thanks Any questions about the pattern please email me at...cmsally@primus.ca

Materials Needed

I used worsted weight yarn in grey, brown, tan and red

Size 4 mm crochet hook

Stitch marker I use a scrap of contrasting yarn

Yarn needle (large eyed)

Fiberfill

Velcro and hot glue gun (glue gun is optional, you could sew on the Velcro if desired)

Notes

Finished tool belt measures 27 ½", the pliers, wrench and screwdriver measure 7", and the hammer is 8".

A portion of this pattern is crochet in continuous spirals where the rounds are not joined. It will be stated if rounds are to be joined. When working in continuous rounds, place stitch marker at the beginning of each round.

Crochet Terms and Abbreviations

Chain...ch

Single crochet....sc

Double crochet....dc

Slip stitch....ss

To crochet 2 stitches together....pick up the front loops only of the next 2 stitches, pull loop of yarn through both stitches together and proceed with stitch as usual.

Fpdc...front post double crochet

Bpdc...back post double crochet

Fpsc...front post single crochet

Bpsc...back post single crochet

Hammer use grey and brown yarn The head of the hammer(the metal part) is made of 3 separate pieces that are sewn together

Piece #1

1. Ch 2, work 6sc in second ch from hook.

2. Work 2sc in each stitch =12sc.

3. Work (3sc in next stitch, 2sc) x4 =20sc.
4. Work 20sc around.
5. Work 20 sc around in back loops.
- 6-10. Work 20sc around.
11. Work (2sc, sc next 2 together) x5 =15sc.
12. Work 15sc around. Don't bind off. Set piece aside.



Piece #2

1. Ch 2, work 6sc in second ch from hook.
2. Work 2sc in each stitch =12sc.
3. Work (1sc, 2sc in next stitch) x6 =18sc.
4. Work 18sc around in back loops.
5. Work 18sc around.
6. Working in back loops (sc, sc next 2 together) x6 = 12sc.
7. Work 12sc around.
8. Work 12sc around, ss and bind off leaving a 6" tail of yarn.

Piece #3 these will be the claws of the hammer

1. Ch2, work 6sc into second ch from hook.
2. Work 6sc around.
3. Work 6sc around.
4. Work (sc, 2sc in next stitch) x3 =9sc.
5. Work 6sc around.
6. Work 6sc around.
7. Work 9sc around. Bind off, leaving a 6" tail of yarn. This tail of yarn will later be used to sew up the hole between the 2 claws.
8. Follow steps 1-7 again to make a second piece except don't bind off this second one.
9. Now you need to join the 2 pieces together to make the hammer claws. Keeping the second piece on your hook, sc around the 9stitches of the first piece, then continue to sc around the 9 stitches of the second piece. See photos next page.
10. Work 18sc around.
11. Work 18sc around, ss and bind off leaving an 8" tail of yarn.



12. Use needle on tail of yarn to sew the hole closed that was left between the 2 claws.
13. Sew the claws to the hammer piece #1.
14. Lightly stuff the hammer piece #2 and sew it to hammer piece #1.



Handle of Hammer use brown yarn

1. Attach brown yarn to last stitch of hammer (piece #2) and work as follows...15sc around.
2. Work 15sc around. Stuff hammer now.
3. Work 15sc around.
4. Work (sc, sc next 2 together) x5 =10sc.
- 5 – 10. Work 10sc around.
11. Work (sc, 2sc in next stitch) x5 =15sc. Stuff the handle firmly with fiberfill and continue to stuff as you go.
- 12-23. Work 15sc around.
24. Work (sc, sc next 2 together) x5. Bind off leaving a 6" tail of yarn. Use needle on tail of yarn to gather remaining stitches together to close.

Wrench use grey yarn the wrench is made in 3 pieces

Pieces #1 and #2

1. Ch 5, ss in beginning ch to make a circle.
2. Ch 2, work 7dc into center of circle. Bind off leaving a 6" tail of yarn.
3. Repeat rows 1 and 2 to make a second piece.
4. Use needle on tail of yarn to sew using an overcast stitch, the 2 curves edges together.

Piece #3

1. Ch 10, ss in beginning ch to make a circle.
2. Sc around on these 10 stitches until piece measures 4 ¼".
3. Work (sc 2, 4dc in next stitch, sc 2) x 2.
4. Work (sc 2, 4dc, sc 2) x 2.

5. Work (sc2, 4dc, sc 2) x2. Bind off leaving a 6" tail of yarn. Use needle on tail of yarn to sew edges together.
6. Using needle on tail of yarn to sew the flat edge of pieces #1 and #2 to the end of the wrench (piece #3).



Pliers use red and grey yarn make 2

1. Starting with grey yarn, ch2, work 6sc into second ch from hook.
2. Work (sc, 2sc in next stitch) x3 =9sc.
- 3-5. Work 9sc around.
6. Work (sc next 2 together) x2, sc 5 =7sc.
- 7-12. Work 7sc around.
13. Change to red yarn, work 7sc around.
14. Work 7sc around. Stuff now and continue stuffing as you go. You don't need to push the fiberfill into the grey part of the pliers, you can leave them unstuffed, and just stuff the red part (handles) of the pliers.
- 15-17. Work 7sc around.
18. Work (2sc in next stitch) x2, sc5 =9sc.
- 19-23. Work 9sc around.
24. Work (2sc, 2sc in next stitch) x3 =12sc.
- 25-35. Work 12sc around.
36. Work 12sc around, bind off leaving a 6" tail of yarn. Use needle on tail of yarn to gather remaining stitches closed.

To assemble the pliers

1. With grey yarn ch2, work 6sc into second ch from hook. Bind off leaving a 6" tail of yarn. This will be the bolt that holds the 2 plier pieces together.
2. Hold the 2 pliers pieces together, as in the photo, and sew the bolt onto of the 2 pieces, making sure that your stitches go through both pieces.



Screwdriver use red and grey yarn

1. With grey yarn, ch2, work 5sc into second ch from hook.
2. Working in continuous rounds on these 5 stitches, sc around until piece measures 3 1/2". Bind off.
3. With red yarn, make the handle now, ch4, ss in beginning ch to make a circle.
4. Ch2, work 6dc into center of circle, ss to join.
5. Ch2, work 2dc into each stitch, ss to join =12dc.
6. Ch2, work bpdC into each stitch.
- 7-18. Ch2, work fpdc into each stitch.
19. Ch1, work 12dc around in back loops. Bind off leaving an 8" tail of yarn. Stuff handle firmly with fiberfill.
20. Sew the screwdriver to the handle.



Tool Belt use tan yarn

1. Ch 2, work 6dc in second ch from hook.
2. Work 2dc in each stitch =12dc.
3. Work 12 dc around.
4. Work (dc, 2dc in next stitch) x6 =18dc.
5. Work 18dc around.
6. Working in continuous rounds on these 18 stitches, dc around until piece measures 27", or whatever length you need to fit around the waist of the person you are making this for.
7. When you have reached the desired length, press(not with an iron, just your fingers) the piece flat and dc across going through both layers at the same time. Bind off.


Belt Buckle use grey yarn

1. Ch 40, sc 39 starting in second ch from hook.
2. Ch 1, turn, work 39sc across. Bind off leaving a 24" tail of yarn. Fold piece in half lengthwise and use needle on tail of yarn to sew seam closed. Fold piece into a buckle shape and tack in place. See photo. Weave belt through buckle. Tack buckle in place if desired.
3. Either sew or hot glue Velcro in place.



Tool Pouch use tan yarn

1. Ch 50, ss in beginning ch to join and make a circle. This row will be the bottom of the pouch.
- 2-10. Work 50sc around.
11. Work (ch1, fpst) repeat around, ss to join. Bind off leaving a 12" tail of yarn.
12. To make the holes for the tools to slide into, press the bottom of the pouch together and tack in place in 2 spots to create 3 pockets. See photo. Adjust the size of your pockets to fit the tools.

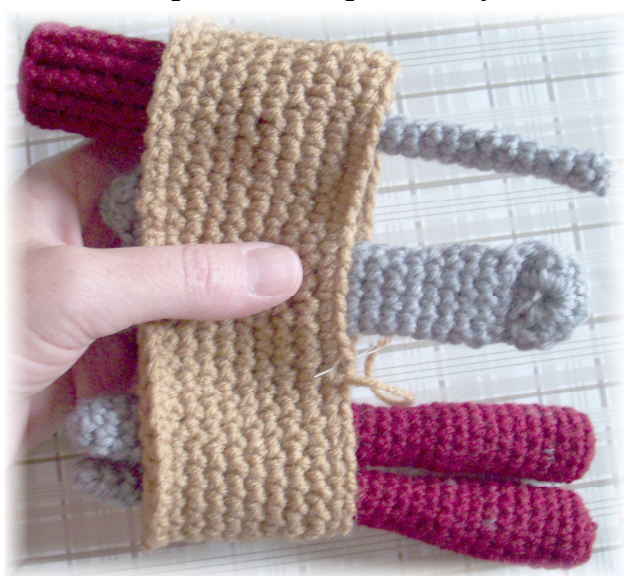

Hammer Hook use grey yarn

1. Ch 20, work 19sc starting in the second ch from the hook. Bind off leaving an 8" tail of yarn.
2. Sew both end the the belt so that the hammer slides in. See photo previous page.

Nail Pouch use tan yarn

1. Ch 2, work 6sc in second ch from hook.
2. Work 2sc in each stitch =12sc.
3. Work (1sc, 2sc in next stitch) x6 =18sc.
4. Work (2sc, 2sc in next stitch) x6 =24sc.
5. Work (3sc, 2sc in next stitch) x6 =30sc
6. Work 30 sc around in back loops.
- 7-15. Work 30sc around.
16. Work (ch1, fpdc) repeat around, ss to join. Bind off leaving a 12" tail of yarn. Use needle on tail of yarn to sew nail pouch to the belt.