

**DOUBLE
KNITTING**



Hooded Jacket

Measurements

To fit chest

46	51	56	61	cm
18	20	22	24	in

Actual size

58	63	70	75	cm
23	25	27½	29½	in

Finished length

24	29	33	38	cm
9½	11½	13	15	in

Sleeve, measured down centre

14	18	24	28	cm
5½	7	9½	11	in

Quantities

Patons Fairytale DK (Tumble dry) (6309) and Fairytale Spot Prints DK (Tumble dry) (6261)

4 5 6 7 50 gram balls

Quantities of yarn are approximate as they are based on average requirements.
Check actual yarn colour - as printing may not match yarn exactly.

Pair each Patons 3 ¼ mm (USA3) and 4 mm (USA 6) needles. Patons Cable pin. 6 buttons.

Tension
On 4 mm needles, 22 sts and 30 rows to 10 cm (stocking st).


It is important to check your tension before starting your garment. If there are too many stitches to 10 cm, your tension is tight and you should change to a larger size needle. If there are too few, your tension is loose and you should change to a smaller size needle.

Caution
It is essential to work to the stated tension, and we cannot accept responsibility for the finished product if any yarn other than the specified yarn is used.

Abbreviations
K=knit; P=purl; st=stitch; stocking st=1 row K, 1 row P; garter st=every row K; tog=together; tbl=through back of loops; inc=increase by working into front and back of st; dec=decrease by working 2 sts together; beg=beginning; alt=alternate; rep=repeat; cont=continue; meas=measures; foll=following;

rem=remain(ing); RS=right side; WS=wrong side; cm=centimetres; in=inches; mm=millimetres; sL1K=slip 1 knitways; yfwd=yarn forward; pssso=pass slip st over; patt=pattern; 0=no st, row or time to be worked in this size; M1=make a st by picking up horizontal loop lying before next st and working into back of it.

K1bw=K1 below, K into next st 1 row below, at the same time slipping off st above (see diagram).

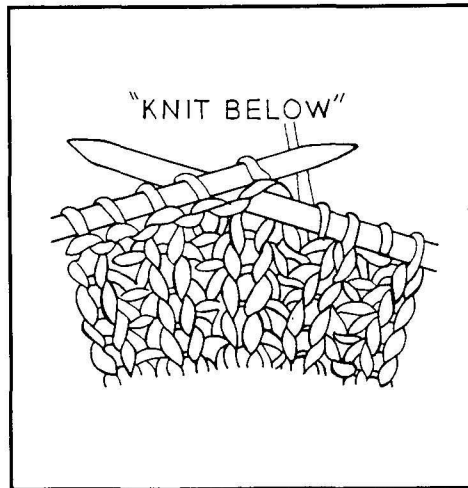

Cr3L=slip next 2 sts on cable pin and leave at front of work, P1, then K2 from cable pin.

Cr3R=slip next st on cable pin and leave at back of work, K2, then P1 from cable pin.

C4F=slip next 2 sts on cable pin and leave at front of work, K2, then K2 from cable pin.

U.S.A. Glossary

Cast off=bind off; tension=gauge; knit up=pick up and knit; stocking st=stockinette st; yarn forward, yarn over needle or yarn round needle=yarn over.

Instructions are given for the first size, with larger size(s) given in square brackets []. Where only one figure is given this applies to both (all) sizes.

Before starting to knit, read the instructions carefully and circle all figures relating to your size with a coloured pencil.

PANEL PATT A (6 sts)

Row 1 - (RS), P1, C4F, P1.

Row 2 - K1, P4, K1.

Row 3 - P1, K4, P1.

Row 4 - As row 2.

These 4 rows form panel patt A.

PANEL PATT B (20 sts)

Row 1 - (RS), P5, Cr3R, C4F, Cr3L, P5.

Row 2 and every alt row - K all K sts and P all P sts.

Row 3 - P4, Cr3R, P1, K4, P1, Cr3L, P4.

Row 5 - P3, Cr3R, P2, C4F, P2, Cr3L, P3.

Row 7 - P2, Cr3R, P3, K4, P3, Cr3L, P2.

Row 9 - P1, Cr3R, P4, C4F, P4, Cr3L, P1.

Row 11 - P1, Cr3L, P4, K4, P4, Cr3R, P1.

Row 13 - P2, Cr3L, P3, C4F, P3, Cr3R, P2.

Row 15 - P3, Cr3L, P2, K4, P2, Cr3R, P3.

Row 17 - P4, Cr3L, P1, C4F, P1, Cr3R, P4.

Row 19 - P5, Cr3L, K4, Cr3R, P5.

Row 20 - As row 2.

These 20 rows form panel patt B.

LEFT FRONT

****With 3 ¼ mm needles, cast on 29 [31, 35, 37] sts.**

Rib row 1 - (RS), K1, *P1, K1; rep from * to end.

Rib row 2 - P1, *K1, P1; rep from * to end.

Rep these 2 rows for 3 [3, 4, 4] cm, ending with row 1.

Increase row - Rib 2 [3, 5, 6], *M1 (by picking up horizontal loop lying before next st and working into back of it), rib 3; rep from * to last 3 [4, 6, 7] sts, M1, rib to end (38 [40, 44, 46] sts).

Change to 4 mm needles and rib patt, placing panel patts thus:**

Row 1 - (RS), K6 [8, 12, 14], panel patt A as row 1, K5, panel patt B as row 1, P1.

Row 2 - K1, panel patt B as row 2, (P1, K1bw) twice, P1, panel patt A as row 2, (P1, K1bw) 2 [3, 5, 6] times, P1, K1.

These 2 rows set patt.

Cont in patt, working appropriate rows of panel patts until work meas 20 [25, 29, 34] cm, ending with WS facing for next row.

Shape neck

Next row - Cast off 8 sts, patt to end. Keeping patt correct, dec 1 st at neck edge on next 7 rows (23 [25, 29, 31] sts).

Work straight until Left Front meas 24 [29, 33, 38] cm, ending with RS facing. Cast off.

RIGHT FRONT

Work as Left Front from ** to **.

Row 1 - (RS), P1, panel patt B as row

1, K5, panel patt A as row 1, K6 [8, 12, 14].

Row 2 - K1, P1, (K1bw, P1) 2 [3, 5, 6] times, panel patt A as row 2, (P1, K1bw) twice, P1, panel patt B as row 2, K1.

These 2 rows set patt.

Work to match Left Front, reversing shapings, working an extra row before neck shaping and shoulder cast-off.

BACK

With 3 ¼ mm needles, cast on 57 [63, 69, 73] sts.

Rib row 1 - (RS), K1, *P1, K1; rep from * to end.

Rib row 2 - P1, *K1, P1; rep from * to end.

Rep these 2 rows for 3 [3, 4, 4] cm, ending with row 1.

Increase row - Rib 6 [1, 1, 3], *M1, rib 2 [3, 3, 3]; rep from * to last 7 [2, 2, 4] sts, M1, rib to end (80 [84, 92, 96] sts).

Change to 4 mm needles and rib patt, placing panel patts thus:

Row 1 - (RS), K6 [8, 12, 14], panel patt A as row 1, K5, panel patt B as row 1, panel patt A as row 1, panel patt B as row 1, K5, panel patt A as row 1, K6 [8, 12, 14].

Row 2 - K1, P1, (K1bw, P1) 2 [3, 5, 6] times, panel patt A as row 2, (P1, K1bw) twice, P1, panel patt B as row 2, panel patt A as row 2, panel patt B as row 2, (P1, K1bw) twice, P1, panel patt A as row 2, (P1, K1bw) 2 [3, 5, 6] times, P1, K1.

These 2 rows set patt.

Cont in patt, working appropriate rows of panel patts until Back matches Fronts to shoulder cast-off, ending with RS facing for next row.

Shape shoulders

Cast off 23 [25, 29, 31] sts at beg of next 2 rows. Cast off rem 34 sts.

SLEEVES

With 3 ¼ mm needles, cast on 29 [31, 33, 35] sts and work in rib as on Left Front for 3 [3, 4, 4] cm, ending with row 1.

Increase row - Rib 2 [3, 4, 2], *M1, rib 3 [4, 3, 3]; rep from * to last 3 [4, 5, 3] sts, M1, rib to end (38 [38, 42, 46] sts).

Change to 4 mm needles and rib patt, placing panel patts thus:

Row 1 - (RS), K5 [5, 7, 9], *panel patt A as row 1, K5; rep from * twice more, K0 [0, 2, 4].

Row 2 - P1, (K1bw, P1) 2 [2, 3, 4] times, *panel patt A as row 2, (P1, K1bw) twice, P1; rep from * twice more, (K1bw, P1) 0 [0, 1, 2] times.

These 2 rows set patt.

Cont in patt as set, working appropriate rows of panel patts, shaping sides by inc 1 st at each end of 5th row (from beg of patt), and every foll 4th [6th, 6th, 10th] row until there are 48 [48, 46, 52] sts, then on every foll 6th [8th, 10th, 12th] row until there are 54 [54, 58, 62] sts, taking inc sts into rib patt.

Work straight until Sleeve meas 14 [18, 24, 28] cm, ending with RS facing. Cast off loosely.

MAKE UP

Do not press.

Join shoulder seams. Place centre of cast-off edge of sleeves to shoulder seams, then sew Sleeves to Back and Fronts. Join side and sleeve seams.

Hood

With RS facing and 4 mm needles, **knit up** 8 sts from right front neck, 16 sts up right side of neck, 31 sts from back, 16 sts down left side of neck, then 8 sts from left front neck (79 sts).

Next row - (Foundation row), *K1, P1; rep from * to last st, K1.

Now rib patt thus:

Row 1 - (RS), K.

Row 2 - K1, *P1, K1bw; rep from * to last 2 sts, P1, K1.

These 2 rows form patt.

Cont in patt for 15 cm, ending with RS facing for next row.

Cast off 24 sts at beg of next 2 rows (31 sts).

Keeping patt correct, work straight for 11 cm, ending with RS facing. Leave rem sts on a spare needle.

Join side seams of Hood.

Button Border
With 3 1/4 mm needles, cast on 7 sts.

Row 1 - (RS), K2, (P1, K1) twice, K1.

Row 2 - K1, (P1, K1) 3 times.

Rep these 2 rows until Border, when slightly stretched, fits up Right Front to start of neck shaping, sewing in place as you go along. Cast off in rib.

Mark position of 6 buttons on Button Border with pins to ensure even spacing, first to come 1 cm up from lower edge, last to come 1 cm below top edge and remainder spaced evenly between.

Buttonhole Border
Work as Button Border with the addition of 6 buttonholes to correspond with pins on Button Border.

To make a buttonhole: (RS), rib 3, cast off 1, rib to end and back, casting on 1 over st cast off.

Hood Border
With RS facing and 3 1/4 mm needles, **knit up** 33 sts up right side of hood, 31 from front of hood, then **knit up** 33 sts down left side of hood (97 sts).

Starting with row 2, work in rib as on Left Front for 5 rows. Cast off **loosely** in rib. Join side edges of Hood Border to top edge of Button Border and Buttonhole Border.

Sew on buttons.

Do not dry handknits in harsh sunlight as fading or yellowing may occur.

You may tumble dry your garment with confidence in any domestic tumble dryer at temperatures of up to 60°C. Recommended by Hoover.



Coats Patons
Crafts



We shall be pleased to deal with your queries if you write enc. a ball band of the yarn specified and a s.a.e. to Consumer Helpline, Coats Patons Crafts, McMullen Road, Darlington, Co. Durham DL1 1YQ or phone (0325) 381010.
WARNING - COPYRIGHT All Patons patterns are protected by the law of copyright and may not be reproduced either by photocopying or any other means. They are sold on condition that they are used only for non-commercial purposes. All other rights are expressly reserved by Coats Patons Crafts.