




8p

611

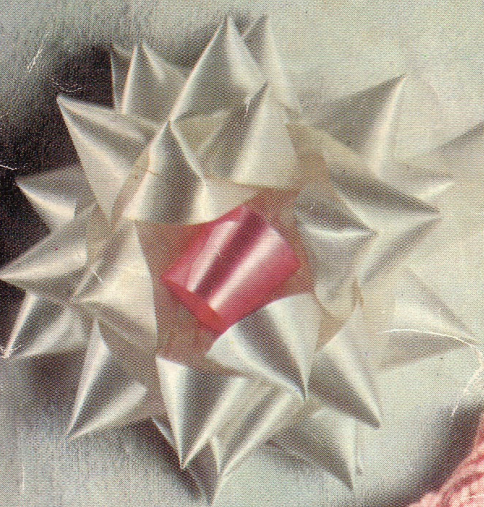

BELLMANS

4 ply

or double knitting

Sizes 18 to 26



CABLED IN PINK

As dyes vary it is advisable to purchase a sufficient quantity to complete garment.

MATERIALS

Size	18	20	22	24	26 ins
------	----	----	----	----	--------

BELLMANS 4 PLY

	3	4	5	6	7
--	---	---	---	---	---

1 oz balls
Pair needles each size Nos. 10 and 12.

BELLMANS DOUBLE KNITTING

	5	6	7	8	9
	or 3	4	5	5	6

1 oz balls
6 × 50 gram balls

Pair needles each size Nos. 9 and 11.

Cable needle.

6 or 8 Bellmans Buttons.

MEASUREMENTS

To fit Chest	18	20	22	24	26 ins
Length from Shoulder	9½	10½	11½	12½	13½ ins
Length of Sleeve Seam	6	7½	9	10½	12 ins

TENSION

7 stitches and 9 rows to 1 inch on No. 10 needles and 4 ply

6 stitches and 8 rows to 1 inch on No. 9 needles and Double Knitting.

To test your tension:

Using needles stated in pattern cast on required number of stitches and work stated number of rows to produce a two inch square. Cast off. If the piece you have knitted measures two inches by two inches your tension is correct. If it is larger your tension is too loose; try a size finer needle. If it is smaller your tension is too tight; try a size thicker needle.

N.B. Underline all figures for size required before commencing. Where one set of figures only is given this applies to all sizes.

ABBREVIATIONS

k=knit. p=purl. st, sts=stitch, stitches.

psso=pass slip stitch over. tog=together.

st st=stocking stitch (1 row knit, 1 row purl).

inc=increase. dec=decrease. sl=slip.

rep=repeat. in, ins=inch, inches.

alt=alternate. beg=beginning.

c6f=cable 6 front (slip 3 sts onto a cable needle and leave at front of work, k3 sts, then k3 sts. from cable needle) c6b=cable 6 back (slip 3 sts onto cable needle and leave at back of work, k3 sts, then k3 sts from cable needle) c4f=cable 4 front (slip 2 sts onto a cable needle and leave at front of work, k2 sts, then k2 sts from cable needle) c4b=cable 4 back (slip 2 sts onto cable needle and leave at back of work, k2 sts, then k2 sts from cable needle).

Have you checked your tension?

4 PLY

BACK

Using No. 12 needles cast on 70(76: 84: 90: 98) sts and work in k1, p1 rib for 1(1: 1½: 1½: 2) ins.

Change to No. 10 needles and proceed in st st until work measures 6(6½: 7: 7½: 8) ins from beg, ending on a p row.

Shape raglans

Cast off 4(4: 4: 4: 5) sts at beg of next 2 rows.

Cast off 3(4: 4: 4: 5) sts at beg of next 2 rows.

5th row: k2, sl1, k1, psso, k to last 4 sts, k2tog, k2.

6th row: k1, p to last st., k1.

Now rep 5th and 6th rows, until 24(24: 26: 28: 28) sts remain.

Leave sts on a st holder.

LEFT FRONT

Using No. 12 needles cast on 39(42: 46: 49: 53) sts and work in k1, p1 rib for 1(1: 1½: 1½: 2) ins.

Change to No. 10 needles and proceed as follows:—

Next row: k31(34: 38: 41: 45) sts, slip last 8 sts onto a safety pin for Front Band.

2nd row: k2, p6, k2, p to end.

3rd row: k23(26: 30: 33: 37) sts, c6f, k2.

4th row: as 2nd.

5th row: k.

6th row: as 2nd.

7th row: as 5th.

Now rep 2nd to 7th rows inclusive, until work measures 6(6½: 7: 7½: 8) ins from beg, ending at side edge.

Shape raglan

Keeping front cable pattern correct, cast off 4(4: 4: 4: 5) sts at beg of next row.

Work 1 row.

Cast off 3(4: 4: 4: 5) sts at beg of next row.

4th row: work to last st, k1.

5th row: k2, sl1, k1, psso, work to end.

Now rep 4th and 5th rows until 13(14: 16: 18: 19) sts remain, ending at front edge.

Shape neck

Keeping pattern correct, continue to dec at raglan edge as before and at the same time dec 1 st at neck edge on every row until 3(4: 4: 5: 6) sts. remain.

Keeping neck edge straight, continue to dec at raglan edge until 1 st remains.

Fasten off.

RIGHT FRONT

Using No. 12 needles cast on 39(42: 46: 49: 53) sts and work in k1, p1 rib for ½ in.

Next row: (buttonhole) rib 3 sts, cast off 2 sts, rib to end.

Next row: rib, casting on 2 sts over those cast off on previous row.

Continue in rib until work measures 1(1: 1½: 1½: 2) ins. from beg, ending at side edge.

Change to No. 10 needles and proceed as follows:—

Next row: p31(34: 38: 41: 45) sts, slip last 8 sts onto a safety pin for Front Band.

2nd row: k.

3rd row: p to last 10 sts, k2, p6, k2.

4th row: k2, c6b, k to end.

5th row: as 3rd.

6th row: as 2nd.

7th row: as 3rd.

Now complete to match Left Front reversing all shapings.

SLEEVES

Using No. 12 needles, cast on 38(40: 42: 44: 46) sts and work in k1, p1 rib for 1(1: 1½: 1½: 2) ins, inc 6 times evenly spaced across last row. (44: 46: 48: 50: 52 sts).

Change to No. 10 needles and proceed as follows:—

1st row: k.

2nd row: k17(18: 19: 20: 21) sts, k2, p6, k2, p to end.

3rd row: k19(20: 21: 22: 23) sts, c6f, k to end.

4th row: as 2nd.

5th row: inc in 1st st, k to end, inc in last st.

6th row: p18(19: 20: 21: 22) sts, k2, p6, k2, p to end.

Continue in this manner working cable on every 6th row and extra sts in st st, inc 1 st at each end of following 5th, then every 6th row, until 56(62: 68: 72: 80) sts are on needle.

Continue without further shaping until work measures 6(7½: 9: 10½: 12) ins from beg, ending on a wrong side row.

Shape tcp

Keeping pattern correct, cast off 4(4: 4: 4: 5) sts at beg of next 2 rows.

Cast off 3(4: 4: 4: 5) sts at beg of next 2 rows.

Next row: k2, sl1, k1, pssso, work to last 4 sts, k2 tog, k2.

Next row: k1, work to last st, k1.

Rep last 2 rows until 10 sts remain.

Leave sts on a st holder.

LEFT FRONT BAND

Slip 8 sts off safety pin onto a No. 12 needle and continue in rib until band is long enough to reach up Left Front to commencement of neck shaping when slightly stretched.

Leave sts on spare needle.

RIGHT FRONT BAND

Place markers up Left Front Band for 5(5: 7: 7: 7) buttons, 1st button ½ in from lower edge and remaining buttons evenly spaced. 6th(6th: 8th: 8th: 8th) button to be in neck band.

Slip 8 sts off safety pin onto a No. 12 needle and continue in rib, working buttonholes as before opposite markers.

NECKBAND

Sew raglan seams. With right side of work facing, rib across 8 right front band sts, pick up and k10(12: 14: 16: 18) sts. up right neck edge, k across 10 sleeve top sts, 24(24: 26: 28: 28) sts across back neck and 10 sleeve top sts, pick up and k10(12: 14: 16: 18) sts. down left neck edge and rib across 8 front band sts (80: 84: 90: 96: 100) sts.

Continue in rib on these sts for ½ in, working a buttonhole as before on 4th row.

DOUBLE KNITTING

BACK

Using No. 11 needles, cast on 60(66: 72: 78: 84) sts and work in k1, p1 rib for 1(1: 1½: 1½: 2) ins.

Change to No. 9 needles and proceed in st st until work measures 6(6½: 7: 7½: 8) ins from beg, ending on a p row.

Shape raglans

Cast off 3(4: 4: 4: 4) sts at beg of next 2 rows.

Cast off 3(3: 3: 3: 4) sts at beg of next 2 rows.

5th row: k2, sl1, k1, pssso, k to last 4 sts, k2tog, k2.

6th row: k1, p to last st, k1.

Rep 5th and 6th rows, until 20(20: 22: 24: 24) sts remain.

Leave sts on a st holder.

LEFT FRONT

Using No. 11 needles, cast on 33(36: 39: 42: 45) sts and work in k1, p1 rib for 1(1: 1½: 1½: 2) ins.

Change to No. 9 needles and proceed as follows:—

Next row: k27(30: 33: 36: 39) sts, slip last 6 sts onto a safety pin for Front Band.

2nd row: k2, p4, k2, p to end.

3rd row: k21(24: 27: 30: 33) sts, c4f, k2.

4th row: as 2nd.

5th row: k.

6th row: as 2nd.

7th row: as 5th.

Now rep 2nd to 7th rows inclusive, until work measures 6(6½: 7: 7½: 8) ins from beg, ending at side edge.

Shape raglan

Keeping front cable correct, cast off 3(4: 4: 4: 4) sts at beg. of next row.

Work 1 row.

Cast off 3(3: 3: 3: 4) sts at beg of next row.

4th row: work to last st, k1.

5th row: k2, sl1, k1, pssso, work to end.

Rep 4th and 5th rows until 11(12: 14: 16: 17) sts remain, ending at front edge.

Shape neck

Keeping pattern correct, continue to dec at raglan edge as before **and at the same time** dec 1 st at neck edge on every row until 2(3: 4: 4: 5) sts remain.

Keeping neck edge straight, continue to dec at raglan edge until 1 st remains.

Fasten off.

RIGHT FRONT

Using No. 11 needles cast on 33(36: 39: 42: 45) sts and work in k1, p1 rib for $\frac{1}{2}$ in.

Next row: (buttonhole) rib 3 sts, wfd, k2 tog, rib to end.

Continue in rib until work measures 1(1: $1\frac{1}{2}$: $1\frac{1}{2}$: 2) ins from beg, ending at side edge.

Change to No. 9 needles and proceed as follows:—

Next row: p27(30: 33: 36: 39) sts, slip last 6 sts onto a safety pin for Front Band.

2nd row: k.

3rd row: p to last 8 sts, k2, p4, k2.

4th row: k2, c4b, k to end.

5th row: as 3rd.

6th row: as 2nd.

7th row: as 3rd.

Now complete to match Left Front, reversing all shapings.

SLEEVES

Using No. 11 needles cast on 32 (34: 36: 38: 40) sts and work in k1, p1 rib for 1 (1: $1\frac{1}{2}$: $1\frac{1}{2}$: 2) ins, inc 4 times evenly spaced across last row. (36: 38: 40: 42: 44 sts).

Change to No. 9 needles and proceed as follows:—

1st row: k.

2nd row: p14(15: 16: 17: 18) sts, k2, p4, k2, p to end.

3rd row: k16(17: 18: 19: 20) sts, c4f, k to end.

4th row: as 2nd.

5th row: inc in 1st st, k to end, inc in last st.

6th row: p15 (16: 17: 18: 19) sts, k2, p4, k2, p to end.

Continue in this manner working cable on every 6th row and extra sts in st st, inc 1 st at each end of following 5th, then every 6th row, until 48(54: 58: 62: 68) sts. are on needle.

Continue without further shaping until work measures 6($7\frac{1}{2}$: 9: $10\frac{1}{2}$: 12) ins from beg ending on a wrong side row.

Shape top

Keeping pattern correct, cast off 3(4: 4: 4: 4) sts at beg. of next 2 rows.

Cast off 3(3: 3: 3: 4) sts at beg of next 2 rows.

Next row: k2, sl1, k1, psso, work to last 4 sts, k2tog, k2.

Next row: k1, work to last st, k1.

Rep last 2 rows until 8 sts remain.

Leave sts on a st holder.

LEFT FRONT BAND

Slip 6 sts off safety pin onto a No. 11 needle and continue in rib until band is long enough to reach up Left Front to commencement of neck shaping when slightly stretched.

Leave sts on a spare needle.

RIGHT FRONT BAND

Place markers up Left Front Band for 5 (5: 7: 7: 7) buttons, 1st button $\frac{1}{2}$ in from lower edge and remaining buttons evenly spaced. 6th(6th: 8th: 8th: 8th) button to be in neck band.

Slip 6 sts off safety pin onto a No. 11 needle and continue in rib, working buttonholes as before opposite markers.

NECKBAND

Sew raglan seams. With right side of work facing, rib across 6 right front band sts, pick up and k8(10: 12: 14: 16) sts up right neck edge, k across 8 sleeve top sts, 20(20: 22: 24: 24) sts across back neck and 8 sleeve top sts, pick up and k8(10: 12: 14: 16) sts down left neck edge and rib across 6 front band sts (64: 68: 74: 80: 84 sts).

Continue in rib on these sts for $\frac{1}{2}$ in, working a buttonhole as before on 4th row.

TO MAKE UP

(both garments)

Sew side and sleeve seams, slip stitch front bands neatly into position. Sew on buttons to correspond to buttonholes. Press all seams.

If you require advice on this or any other Bellmans pattern please write to:

PATTERN DEPARTMENT, 100 PARK VILLAGE EAST, LONDON NW1 3ST

